

# SEFUSE®

## Thermal Links



**SCHOTT**  
glass made of ideas

**SCHOTT is a leading international technology group in the areas of specialty glass and glass-ceramics. With more than 130 years of outstanding development, materials and technology expertise we offer a broad portfolio of high-quality products and intelligent solutions that contribute to our customers' success.**

For several decades, SCHOTT has been a leading developer and manufacturer of thermal links. These safety devices serve a broad range of applications, including home appliances, li-ion batteries and automobiles. With many years of extensive experience and a strong development and manufacturing set-up, we can respond flexibly to market needs and customer requirements.

# Contents

Introduction, Advantages, Safety standards	3
Design	4
Applications	5
Standard Ratings	6
Performance Data	14
Definition of Terms	18
Lead Cutting and Taping	18
Cautions	20

Please review the "Cautions" on pages 20 through 23 prior to using SEFUSE®.

## Introduction

SCHOTT develops and manufactures thermal link protection devices, widely known as SEFUSE®. These devices are designed to protect industrial and home electrical equipment from catching fire by sensing overheating and cutting off the electrical circuit immediately.

There are two SEFUSE® types: SF and SM. Both types suit the needs of a wide range of applications. The SF-type uses thermosensitive material as the thermal pellet, while the SM-type uses a fusible alloy.

## SCHOTT SEFUSE® Advantages:

**Trusted:** For many decades, SEFUSE® has been one of the most renowned a trusted brands of thermal links worldwide.

**Safe & Reliable:** SCHOTT SEFUSE® thermal links are highly reliable thermal protection devices that provide excellent, long-lasting performance and meet numerous international industrial safety standards, such as UL, VDE, CCC, PSE, etc. SEFUSE® SF-type fuses, except for SF/K series, have a ceramic pipe that alleviates stress that may occur on the sealing resin when the leads are bent, thereby reliably holding the leads in place.

**Eco-friendly:** SEFUSE® thermal links contain no hazardous substances and comply with WEEE and RoHS standards.

## Safety standards



UL (USA)



cUL (Canada)



CSA (Canada)



VDE (Germany)



CCC (China)



KC (Korea)




PSE (Japan)

# Design


## SF-type

**Series: SF/R, SFH/R, SF/K, SF/Y**

The thermal pellet placed inside the metal case of the SF-type responds to an abnormal temperature situation and triggers the cutoff function. The SF-type features a large rated current of 6A to 15A (AC). Furthermore, the SFH/R series has higher  $T_m$  than conventional thermal links, as well as excellent insulation performance at high temperature conditions.

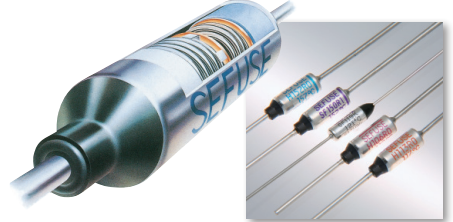


### Before operation

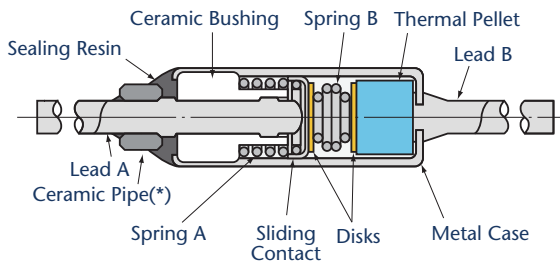

The SF-type contains a sliding contact, springs and a thermal pellet inside a metal case. When spring B is compressed, there is firm contact between lead A and the sliding contact. At normal temperatures, current flows from lead A to the sliding contact and then through the metal case to lead B.

### After operation

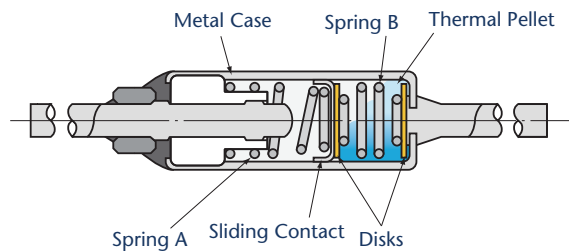


When the ambient temperature rises to the operating temperature of the SF-type, heat is transferred through the metal case and melts the thermal pellet. Springs A and B then stretch and the sliding contact moves away from lead A, thereby opening the electrical circuit.

\*Not used in SF/K series.


## SM-type

**Series: SM/A, SM/B, SM/G**

The SM-type uses a fusible alloy inside a ceramic case. As ceramic is an insulator, the SM-type can be fixed directly where temperature detection is required. The SM-type has a rated current of 0.5A to 2.0A (AC) / 3.0A to 7.0A (DC).

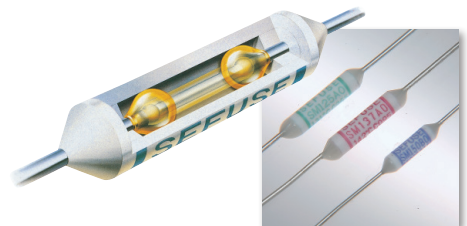


### Before operation

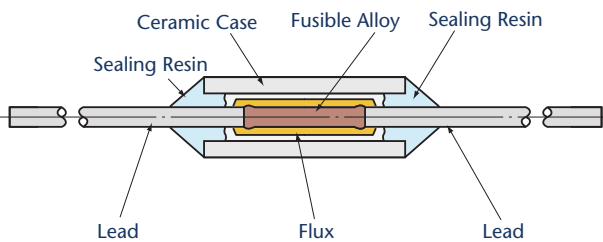

The leads of the SM-type are connected by a fusible alloy thereby allowing the current to flow directly from one lead to the other. The fusible alloy is coated with a special flux.

### After operation

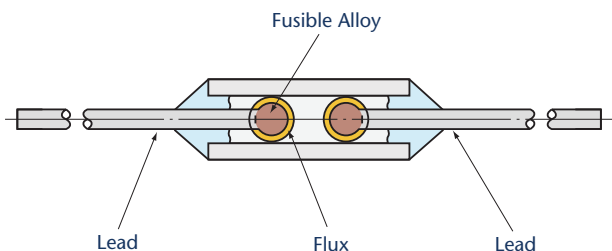

When the ambient temperature rises to the operating temperature of the SM-type, the fusible alloy melts and forms a drop around the end of each lead due to the surface tension and the special flux coating. Without a direct contact between the leads, the electrical circuit is opened.

# Applications



## Small home appliances

Coffee makers, electric kettles, bread makers, rice cookers, hot plates, irons, hair dryers

\* SF-type, SM-type



## Large home appliances

Airconditioners, refrigerators, washing machines, fan heaters, electrical toilets, gas boilers, electrical tables with heaters

\* SF-type, SM-type



## Automotive

Automotive air conditioners, seat heaters, engine cooling

\* SF-type



## Office equipment


Copiers, laser beam printers, facsimile copiers, power taps, etc.

\* SF-type

# Standard Ratings

## SF/R series


Dimension (Unit: mm)

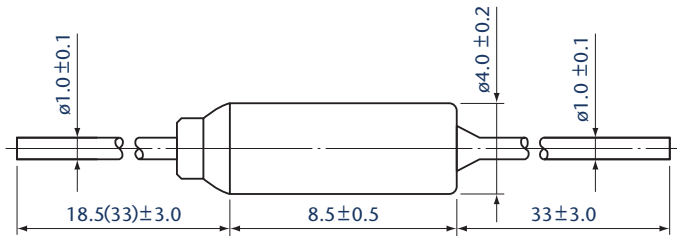


Note: The dimensions for long lead devices are in parentheses.





### Marking 1 (SF70R\*–SF129R\*)

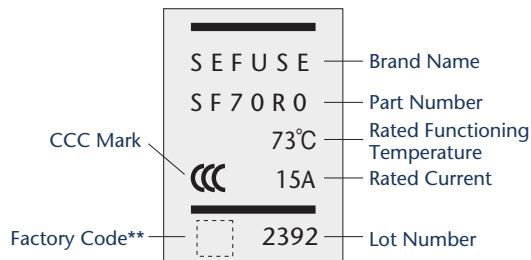

### Marking 2 (SF139R\*–SF240R\*)

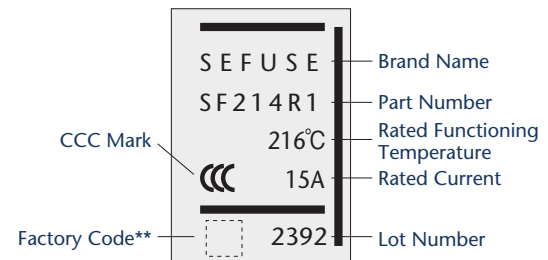


### Marking 3 (SF265R\*)

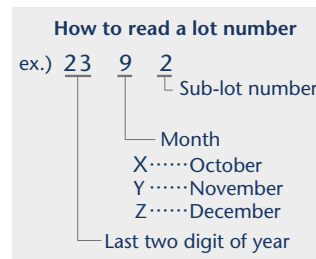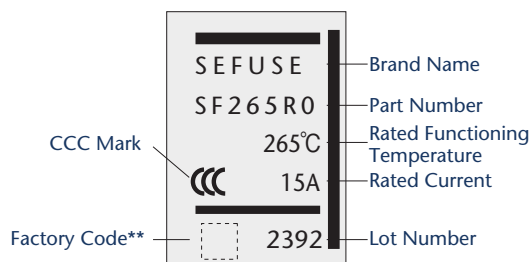

\*\* Factory Code represents the factory location as shown below  
 Thailand : C

## Ratings

1) 2) Part Number * : 0/1 0: standard 1: long	Rated Functioning Temperature Tf (°C)	Operating Temperature (°C)	3)		Rated Current	Rated Voltage	UL/cUL	VDE	CCC Self-declaration#	KTL	PSE 6)	
			Th (°C)	Tm (°C)			Thailand	Thailand	Thailand	Thailand (SU05020-****)	Thailand (JET1974-32001-****)	
										Rating15A	Rating10A	
SF70R*	73	70±2	58	165	15A/10A (Resistive)	AC250V	5)	677802-1171-0015	8) 20209702 05000025  2020970205000025	5004	2001	1003
SF76R*	77	76+0/-4	62								2002	1002
SF81R*	84	81+3/-1	69								2003	1001
SF90R*	94	90±2	79								2004	1004
SF94R*	99	94±2	84								2005	1005
SF113R*	113	108±2	98								2006	1006
SF119R*	121	119±2	106								2007	1007
SF129R*	133	129±2	118								2008	1008
SF139R*	142	139±2	127								2009	1009
SF144R*	144	142±2	129								—	—
SF150R*	152	150+1/-3	137								2012	—
SF167R*	167	164±2	153									
SF184R*	184	182±2	174									
SF188R*	192	188+3/-1	177									
SF214R*	216	214+1/-3	177									
SF229R*	229	227±2	200									
SF240R*	240	237±2	380									
SF265R*	265	263±2	220	480	15A							

Note 1) No use of hazardous substances prescribed by WEEE and RoHS.

Except for SF265R\*, the SF/R series does not use SVHC prescribed by REACH (240 substances, 23rd January, 2024).

2) For standard lead length type, add the suffix "0" at the end of the part number.

For long lead length type, add the suffix "1" at the end of the part number.

3) Th is the maximum temperature measured on the thermal link when it continues to conduct a rated current without changing its state of conductivity for 168 hours.

4) The electrical ratings according to the various safety standards are shown in the following table.

Rated Voltage	UL/cUL	VDE	CCC	KTL	PSE 6)
AC120V	20A (Resistive)	—	—	—	—
AC250V	10A (Resistive)	10A	10A	10A	10A
	15A (Resistive)	15A	15A	15A	15A
	16A (Resistive)	—	—	—	—

5) The following SF-types have passed the Conductive Heat Aging Test (CHAT) specified by the UL safety standard: SF113R\*, SF129R\*, SF139R\*, SF144R\*, SF150R\*, SF167R\*, SF184R\*, SF188R\*, SF214R\*, SF229R\*, SF240R\*, and SF265R\*.

6) With respect to the PSE standard, SF/R is separately available for 10A and 15A ratings. Please select the appropriate product rating according to the specifications of the final application.


7) In case of requests for 10A rated current thermal links, please add "J1" after the part number (name). i.e. SF\*\*\*R0 J1

8) Already withdrawn with old certification # : 2013010205600209

# Standard Ratings

## SFH/R series


Dimension (Unit: mm)

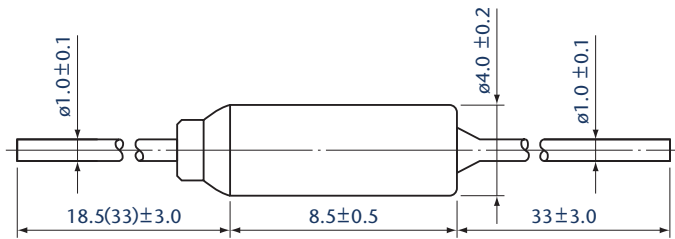


Note: The dimensions for long lead devices are in parentheses.




### Marking 1 (SFH106R\*–SFH129R\*)

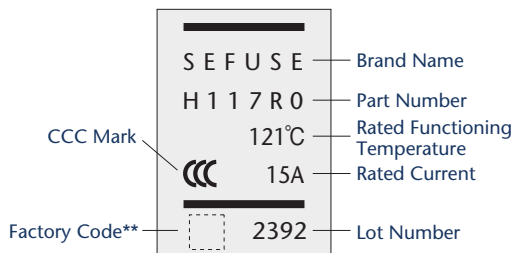

### Marking 2 (SFH134R\*–SFH172R\*)

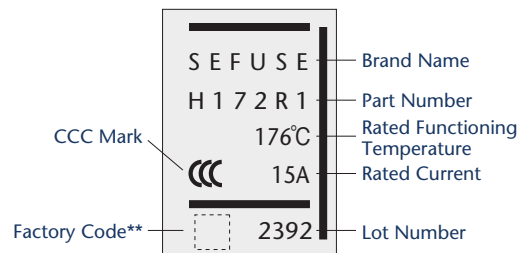


\*\* Factory Code represents the factory location as shown below  
Thailand : C





## Ratings

1) 2) Part Number * : 0/1 0: standard 1: long	Rated Functioning Temperature Tf (°C)	Operating Temperature (°C)	3)			Rated Current	Rated Voltage	UL/cUL	VDE	CCC Self-declaration#	KTL	PSE 6)	
			Th (°C)	Tm (°C)	Thailand			Thailand	Thailand	Thailand (SU05020-****)	Thailand (JET1974-32001-****)		
			Rating15A	Rating10A									
SFH106R*	110	106±3	99	400	4) 7) 15A/10A (Resistive)	4)	5)	677802 -1171 -0016	8) 20209702 05000045  2020970205000045	5005	2003	1001	
SFH109R*	113	109±3	102							5006	2004	1004	
SFH113R*	117	113±3	106							—	2005	1005	
SFH117R*	121	117±3	110							5006	2006	1006	
SFH124R*	128	124±3	117							—	—	—	
SFH129R*	134	129+3/-2	122							—	—	—	
SFH134R*	139	134+3/-2	127							—	—	—	
SFH144R*	144	141±3	132							—	—	—	
SFH152R*	157	152+3/-2	145							—	—	—	
SFH162R*	167	162+3/-2	155							—	—	—	
SFH172R*	176	172±3	165	—	—	—							

Note 1) No use of hazardous substances prescribed by WEEE and RoHS.

The SFH/R series does not use SVHC prescribed by REACH (240 substances, 23rd January, 2024).

2) For standard lead length type, add the suffix "0" at the end of the part number.

For long lead length type, add the suffix "1" at the end of the part number.

3) Th is the maximum temperature measured on the thermal link when it continues to conduct a rated current without changing its state of conductivity for 168 hours.

4) The electrical ratings according to the various safety standards are shown in the following table.

Rated Voltage	UL/cUL	VDE	CCC	KTL	PSE 6)
AC120V	20A (Resistive)	—	—	—	—
AC250V	10A (Resistive)	10A	10A	10A	10A
	15A (Resistive)	15A	15A	15A	15A
	16A (Resistive)	—	—	—	—

5) The following SF-types have passed the Conductive Heat Aging Test (CHAT) specified by the UL safety standard: SFH124R\*, SFH162R\* and SFH172R\*.

6) With respect to the PSE standard, SFH/R is separately available for 10A and 15A ratings. Please select the appropriate product rating according to the specifications of the final application.


7) In case of requests for 10A rated current thermal links, please add "J1" after the part number (name). i.e. SFH\*\*\*R0 J1

8) Already withdrawn with old certification # : 2013010205613895

# Standard Ratings

## SF/K series

Dimension (Unit: mm)

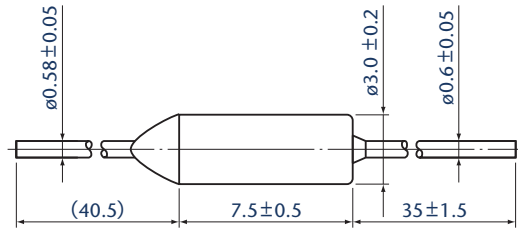


Note: The value in parentheses is a reference value.




### Marking 1 (SF70K–SF119K)

### Marking 2 (SF167K–SF214K)

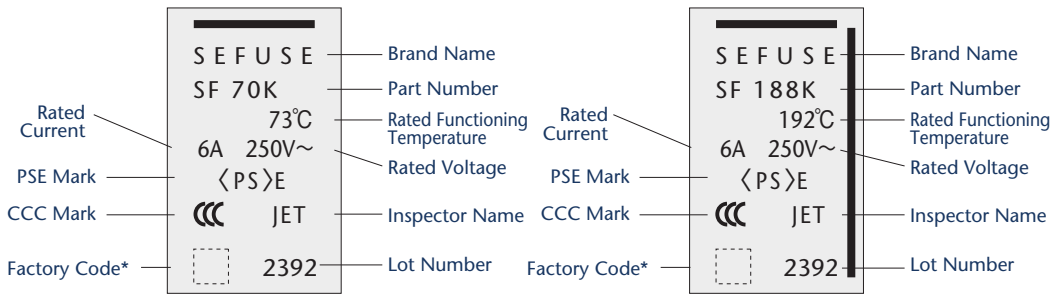


### How to read a lot number



\* Factory Code represents the factory location as shown next Thailand : C

## SF/Y series

Dimension (Unit: mm)

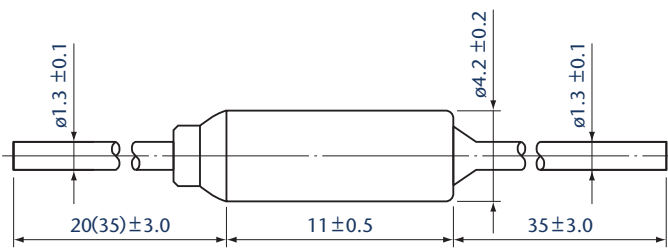


Note: The dimensions for long lead devices are in parentheses.




### Marking 1 (SF70Y–SF129Y)

### Marking 2 (SF139Y–SF240Y)

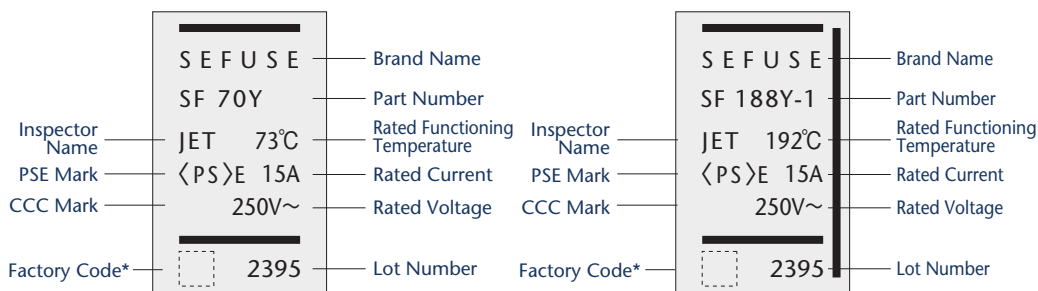


### How to read a lot number



\* Factory Code represents the factory location as shown next Thailand : C

**Ratings**


1) Part Number	Rated Functioning Temperature Tf (°C)	Operating Temperature (°C)	2)		3)		UL/cUL	VDE	CCC Self-declaration#	KTL	PSE
			Th (°C)	Tm (°C)	Rated Current	Rated Voltage	Thailand	Thailand	Thailand	Thailand (SU05020-****)	Thailand (JET1974-32001-****)
SF70K	73	70±2	45	150	6A (Resistive)	AC250V	E71747	677802-1171-0006	5) 6) 2020970205000038  2020970205000038	5004	1003
SF76K	77	76+0/-4	51								
SF90K	94	90±2	66								
SF94K	99	94±2	84								
SF96K	99	96±2	71								
SF119K	121	119±2	94								
SF167K	167	164±2	152				200	4)		677802-1171-0006	E71747
SF188K	192	188+3/-1	164	300	E71747	677802-1171-0006	5007		1007		
SF214K	216	214+1/-3	198					5008		1008	

Note 1) No use of hazardous substances prescribed by WEEE and RoHS.

All products do not use SVHC prescribed by REACH (240 substances, 23rd January, 2024).

- 2) Th is the maximum temperature measured on the thermal link when it continues to conduct a rated current without changing its state of conductivity for 168 hours.
- 3) The following electrical ratings were used for the UL, VDE, and KTL safety standards: 10A (Resistive)/AC 250V.
- 4) The following SF-types have passed the Conductive Heat Aging Test (CHAT) specified by the UL safety standard: SF167K, SF188K and SF214K.
- 5) Already withdrawn with old certification # : 2008010205282881
- 6) Except for SF94K.

**Ratings**

1) 2) Part Number	Rated Functioning Temperature Tf (°C)	Operating Temperature (°C)	Tm (°C)	Rated Current	Rated Voltage	UL	CCC Self-declaration#	PSE
						Thailand	Thailand	Thailand (JET1974-32001-****)
SF70Y	73	70±2	150	15A (Resistive)	AC250V	—	2020000205000015  2020000205000015	1003
SF76Y	77	76+0/-4						1002
SF90Y	94	90±2						1001
SF94Y	99	94±2						1004
SF96Y	99	96±2						1005
SF113Y	113	110±2	160			E71747	1006	
SF119Y	121	119±2	150					
SF129Y	133	129±2	159			—	1007	
SF139Y	142	139±2						
SF150Y	152	150+1/-3	180			—	1008	
SF167Y	167	164±2	200					
SF184Y	184	182±2	210					
SF188Y	192	188+3/-1	300					
SF214Y	216	214+1/-3	350					
SF229Y	229	227±2	380					
SF240Y	240	237±2	350					

Note 1) No use of hazardous substances prescribed by WEEE and RoHS.


All products do not use SVHC prescribed by REACH (240 substances, 23rd January, 2024).

- 2) Part number indicates thermal links with standard lead lengths. For long lead length types, add the suffix "-1" at the end of the part number.


# Standard Ratings

## SM/A series


Dimension (Unit: mm)

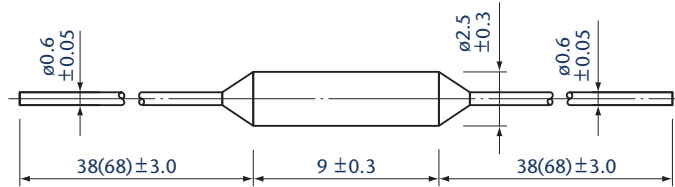

Note: The dimensions for long lead devices are in parentheses.




### Marking

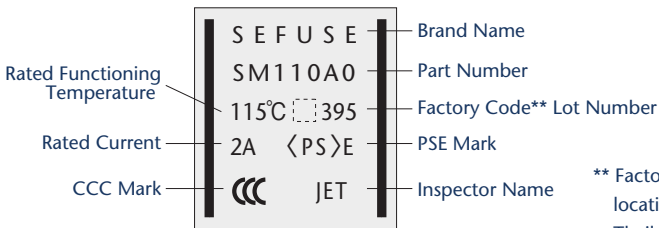


\*\* Factory Code represents the factory location as shown below  
Thailand : C

### How to read a lot number




## SM/B series


Dimension (Unit: mm)

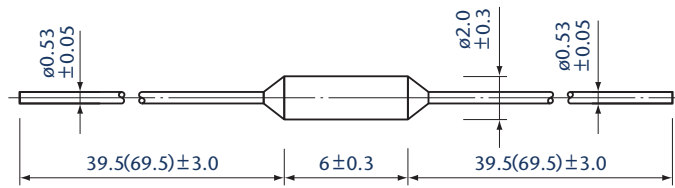

Note: The dimensions for long lead devices are in parentheses.




### Marking

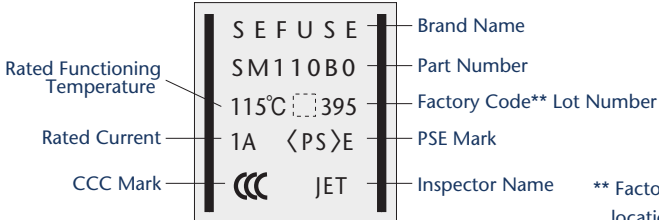


\*\* Factory Code represents the factory location as shown below  
Thailand : C

### How to read a lot number




## SM/G series


Dimension (Unit: mm)

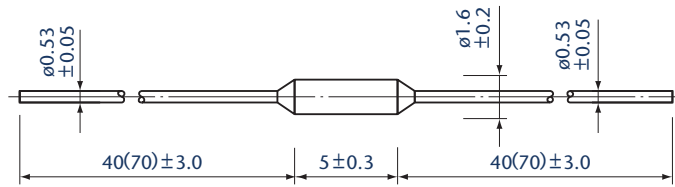

Note: The dimensions for long lead devices are in parentheses.




### Marking

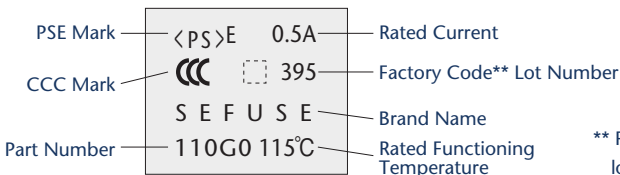


\*\* Factory Code represents the factory location as shown below  
Thailand : C

### How to read a lot number



## Ratings

1) 2) Part Number * : 0/1 0: standard 1: long	Rated Functioning Temperature Tf (°C)	Operating Temperature (°C)	Tm (°C)	Electrical Ratings		UL Thailand	CSA Thailand	VDE Thailand	CCC Self-declaration# Thailand	KTL Thailand (SU05020 -****)	PSE Thailand (JET1974 -32001 -****)		
				AC	DC <sup>3)</sup>								
SM072A*	76	72+3/-2	100	2A (Resistive) AC250V	3A/DC50V(UL) 4A/DC50V(VDE)	E71747	172780 (LR52330)	677802 -1171 -0001	5) 20209702 05000026  2020970205000026	5009	1017		
SM092A*	97	92+3/-2	200		4A/DC50V						4)	1020	
SM110A*	115	110±2	125		7A/ DC50V						5001	1022	
SM125A*	131	126+3/-2	200									5002	1023
SM137A*	142	137+3/-2											1024
SM146A*	151	146+3/-2											
SM150A*	150												

Note 1) No use of hazardous substances prescribed by WEEE and RoHS.

All products do not use SVHC prescribed by REACH (240 substances, 23rd January, 2024).


2) For standard lead length type, add the suffix "0" at the end of the part number. For long lead length type, add the suffix "1" at the end of the part number.

3) DC ratings are approved by UL and VDE.

4) SM072A\* has c-UL recognition.

5) Already withdrawn with old certification # : 2002010205023067

## Ratings

1) 2) Part Number * : 0/1 0: standard 1: long	Rated Functioning Temperature Tf (°C)	Operating Temperature (°C)	Tm (°C)	Electrical Ratings		UL Thailand	CSA Thailand	VDE Thailand	CCC Self-declaration# Thailand	KTL Thailand (SU05020 -****)	PSE Thailand (JET1974 -32001 -****)		
				AC	DC <sup>3)</sup>								
SM092B*	97	92+3/-2	200	1A (Resistive) AC250V	3.5A/DC50V	E71747	172780 (LR52330)	677802 -1171 -0004	4) 20209702 05000019  2020970205000019	5009	1020		
SM110B*	115	110±2	125		6A/DC50V						5001	1022	
SM125B*	131	126+3/-2	200									5002	1023
SM137B*	142	137+3/-2											1024
SM146B*	151	146+3/-2											
SM150B*	150												

Note 1) No use of hazardous substances prescribed by WEEE and RoHS.


All products do not use SVHC prescribed by REACH (240 substances, 23rd January, 2024).

2) For standard lead length type, add the suffix "0" at the end of the part number. For long lead length type, add the suffix "1" at the end of the part number.

3) DC ratings are approved by UL and VDE.

4) Already withdrawn with old certification # : 2002010205023066

## Ratings

1) 2) Part Number * : 0/1 0: standard 1: long	Rated Functioning Temperature Tf (°C)	Operating Temperature (°C)	Tm (°C)	Electrical Ratings		UL Thailand	CSA Thailand	VDE Thailand	CCC Self-declaration# Thailand	PSE Thailand (JET1974 -32001 -****)
				AC	DC <sup>3)</sup>					
SM110G*	115	110±2	125	0.5A (Resistive) AC250V	5A/DC50V	E71747	172780 (LR52330)	677802 -1171 -0003	20209702 05000044  2020970205000044	4) 1022
SM137G*	142	137+3/-2	200							1024
SM146G*	151	146+3/-2								

Note 1) No use of hazardous substances prescribed by WEEE and RoHS.

All products do not use SVHC prescribed by REACH (240 substances, 23rd January, 2024).

2) For standard lead length type, add the suffix "0" at the end of the part number. For long lead length type, add the suffix "1" at the end of the part number.


3) DC ratings are approved by UL and VDE.

4) Already withdrawn with old certification # : 2012010205547628

# Performance Data

## SF/R series · SFH/R series · SF/K series · SF/Y series

Internal resistance

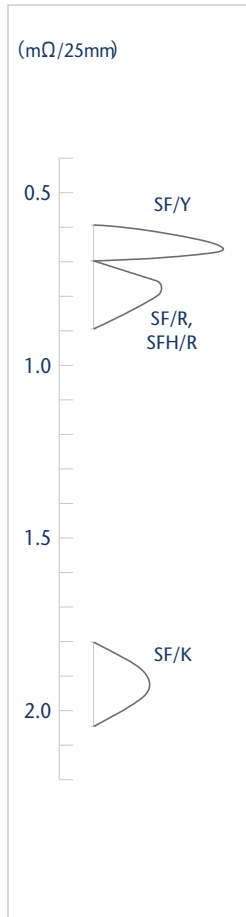


Initial operating temperature (SF/R series · SF/K series · SF/Y series)

Part Number	Operating Temperature (°C)	Part Number	Operating Temperature (°C)	Part Number	Operating Temperature (°C)
SF70R/K/Y	69	SF119R/K/Y	118	SF184R/Y	181
	70		119		182
	71		120		183
SF76R/K/Y	73	SF129R/Y	129	SF188R/K/Y	189
	74		130		190
	75		131		191
SF81R	82	SF139R/Y	138	SF214R/K/Y	212
	83		139		213
	84		140		214
SF90R/K/Y	89	SF144R	140	SF229R/Y	227
	90		141		228
	91		142		229
SF94R/K	93	SF150R/Y	148	SF240R/Y	235
	94		149		236
	95		150		237
SF96K/Y	95	SF167R/K/Y	163	SF265R	264
	96		164		263
	97		165		262
SF113R/Y	108				
	109				
	110				




Initial operating temperature (SFH/R series)

Part Number	Operating Temperature (°C)	Part Number	Operating Temperature (°C)	Part Number	Operating Temperature (°C)
SFH106R	105	SFH124R	123	SFH152R	151
	106		124		152
	107		125		153
SFH109R	108	SFH129R	128	SFH162R	161
	109		129		162
	110		130		163
SFH113R	112	SFH134R	133	SFH172R	171
	113		134		172
	114		135		173
SFH117R	116	SFH144R	142		
	117		141		
	118		140		

Temperature Rise

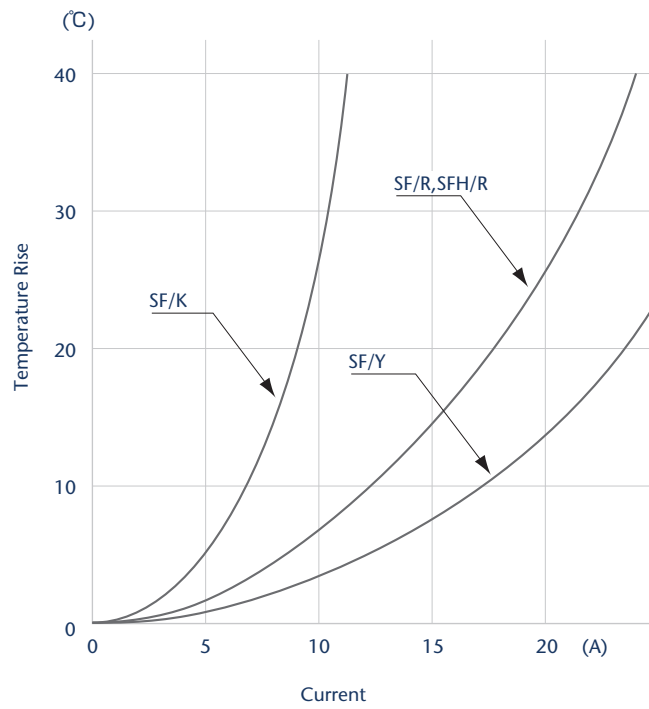

Response Time

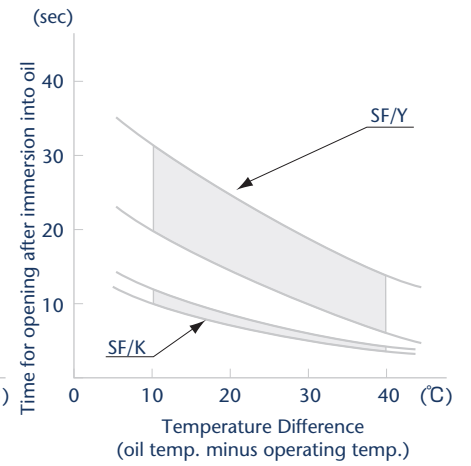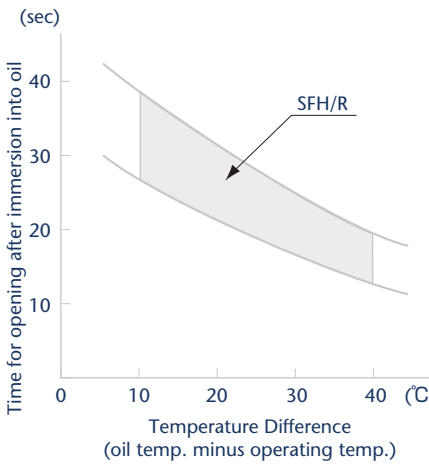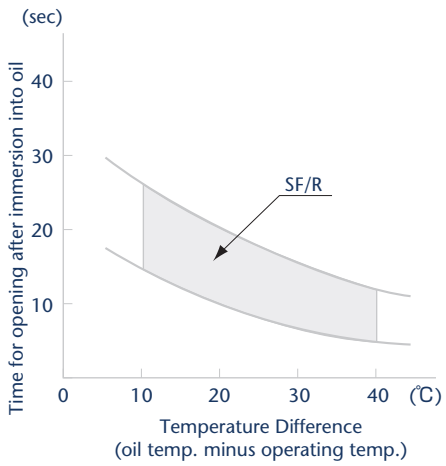

# Performance Data

SM/A series · SM/B series · SM/G series

## Internal resistance and initial operating temperature

Part Number	Internal Resistance (mΩ/25mm)	Operating Temperature (°C)	Part Number	Internal Resistance (mΩ/25mm)	Operating Temperature (°C)
SM072A	3.7	72	SM125A	2.7	124.4
	3.9	73		2.9	125.4
	4.1	74		3.1	126.4
SM092A	5.8	90.6	SM137A	3.8	137
	6.3	91.6		4.3	138
	6.8	92.6		4.8	139
SM110A	2.8	110	SM146A SM150A	4.4	145
	3.0	111		4.7	146
	3.2	112		5.0	147

## Internal resistance and initial operating temperature

Part Number	Internal Resistance (mΩ/25mm)	Operating Temperature (°C)	Part Number	Internal Resistance (mΩ/25mm)	Operating Temperature (°C)
SM092B	8	90.6	SM137B	5.6	137
	9	91.6		6.1	138
	10	92.6		6.6	139
SM110B	4.4	110	SM146B SM150B	5.7	145.5
	4.6	111		6.2	146.5
	4.8	112		6.7	147.5
SM125B	3.8	125			
	4.2	126			
	4.6	127			


## Internal resistance and initial operating temperature

Part Number	Internal Resistance (mΩ/25mm)	Operating Temperature (°C)	Part Number	Internal Resistance (mΩ/25mm)	Operating Temperature (°C)
SM110G	5	110	SM146G	6.4	145.5
	6	111		7.2	146.5
	7	112		8.0	147.5
SM137G	6.8	136			
	7.6	137			
	8.4	138			




### SM/A series

Temperature Rise (°C)

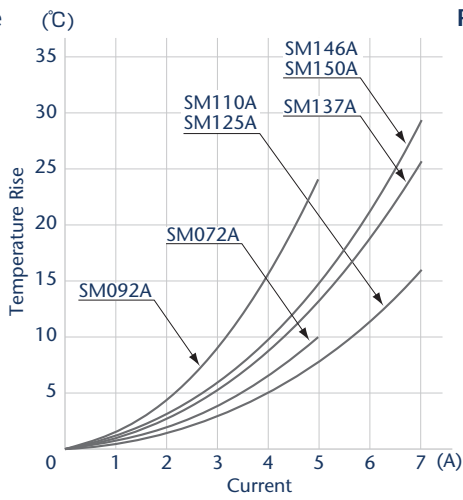


Response Time (sec)

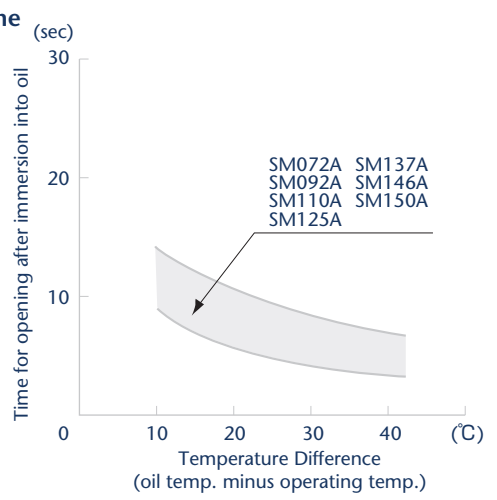


### SM/B series

Temperature Rise (°C)

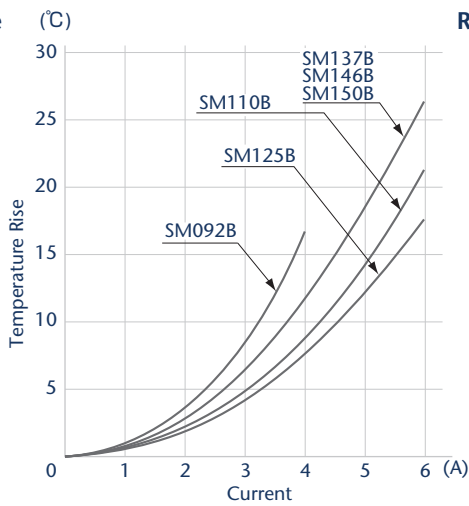


Response Time (sec)

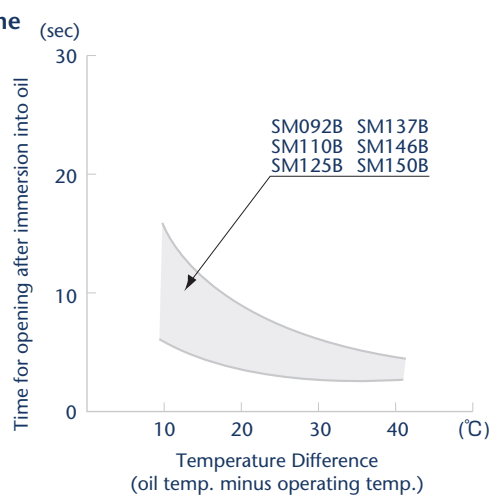


### SM/G series

Temperature Rise (°C)

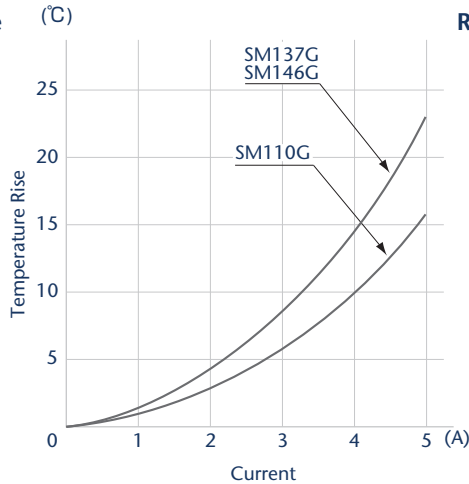

Response Time (sec)

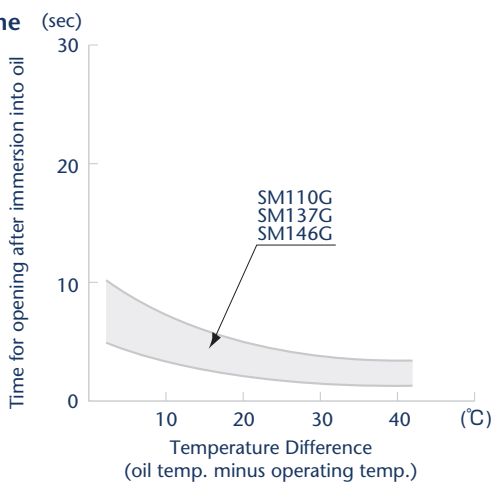

## Definition of Terms

### Rated Functioning Temperature (Tf)

Rated functioning temperature is the operating temperature of the thermal link, measured using the method specified in the safety standard.

As stated in the Electrical Appliance and Material Safety Law (PSE) of Japan (Appendix 3, Section 3), the thermal links should operate within  $\pm 7^{\circ}\text{C}$  of the specified operating temperature. In cases where Tf is greater than  $200^{\circ}\text{C}$ , the thermal links should operate within  $\pm 10^{\circ}\text{C}$  of the specified operating temperature.

In standards that comply with the IEC standard, it is indicated that the thermal links should operate within  $+0/-10^{\circ}\text{C}$  of the specified temperature range.

### Operating Temperature

Operating temperature and tolerance refers to the operating temperature range measured by the following conditions.

A thermal link test sample is placed in the condition where the temperature of a thermostatic oven is raised until  $12^{\circ}\text{C}$  below the rated functioning temperature of the test sample at optionally increasing speed.

Then the temperature of the thermostatic oven is raised at the rate of  $0.5-1.0^{\circ}\text{C}$  a minute.

At this time, the electric current flowing through the test sample for opening confirmation shall be less than 10mA.

Furthermore, the distance between a measuring point and a test sample shall be less than 20 mm.

### Th (Holding Temperature)

Th is the maximum temperature measured on the thermal links when it continues to conduct a rated current without changing its state of conductivity for 168 hours.

### Tm (Maximum Temperature Limit)

Maximum temperature limit is the maximum temperature for which conductivity does not occur again during the following test.

First, the samples are maintained at Tm for a period of 10 minutes. Then, the withstand voltage test is conducted for 2 minutes with twice the rated voltage. During the test, the thermal links must remain in the functioned state, i.e. open. Hence, no current is allowed to pass through.


(Functioned state of the SF-type: less than  $0.2\text{M}\Omega$ ; SM-type: less than  $2\text{M}\Omega$  (between body and lead) and less than  $0.2\text{M}\Omega$  (between lead and lead))

## Lead Cutting and Taping


Lead cutting and taping services are available upon request for the following types.

	Standard Lead Type						Long Lead Type				
	SF/R0 SFH/R0	SF/K	SF/Y	SM/A0	SM/B0	SM/G0	SF/R1 SFH/R1	SF/Y1	SM/A1	SM/B1	SM/G1
Taping	—	○	—	○	○	○	○	—	—	—	—
Lead Cutting	○	○	—	○	○	○	○	—	—	—	—
Lead Forming	○	—	—	—	—	—	○	—	—	—	—

**Taping**

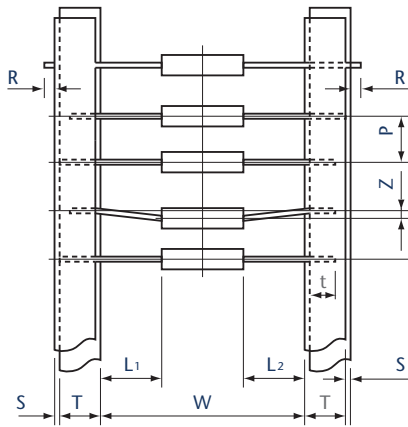

**Reel**

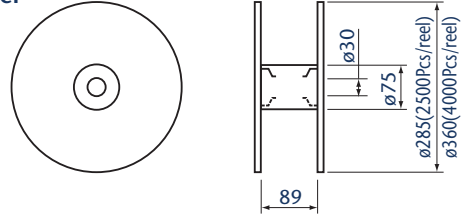


SF/R, SFH/ R : 4000Pcs/reel  
 SF/K, SM : 2500Pcs/reel

(Unit : mm)


W	P	L <sub>1</sub> -L <sub>2</sub>	T	Z	R	t	S
52±2	5±0.5	≤2.0	6±1	≤2.0	≤0.5	≤3.2	≤0.8
63±2							
67±2							

**Lead Cutting**


SF-type



SM-type



**Lead Forming (SF/R, SFH/R)**

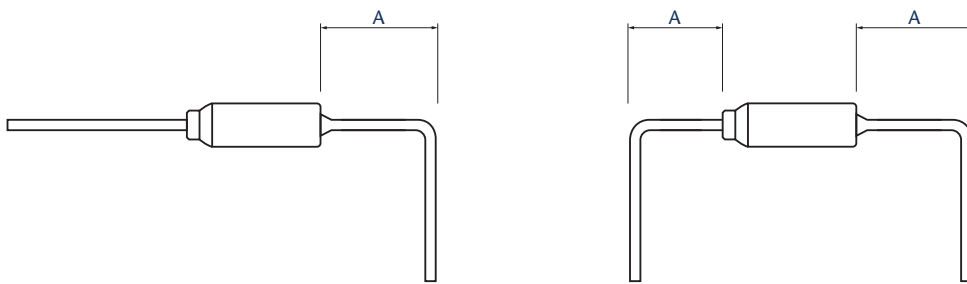

A : Should be more than 5mm

For more information on dimensions not described in diagrams above, please kindly contact us.

**Packing Quantity**

Series	SF/R, SFH/R, SF/Y	SF/K	SM/A, SM/B, SM/G
Packing quantity in a carton box	5,000pcs/box	11,200pcs/box	10,000pcs/box

# Cautions

This section describes points to note, about the design, installation and storage of SEFUSE® thermal links, so as to achieve the optimum performance of these thermal protection devices.

For optimal thermal link performance, it is recommended that customers correctly store the thermal protection devices, design appropriate circuits for the appliances and perform evaluations, mounting and testing steps as necessary. Problems arising from the inappropriate execution of the above would be the sole responsibility of the customer, and SCHOTT declines any and all responsibility.

## Design

**Do not use this device for any purpose other than as a thermal link.**

The thermal link is designed to detect abnormal rises in temperature and open the electrical circuits as required. It is not a current fuse that cuts off excess current. If the thermal link is used as a current fuse, it may malfunction.

**Do not use this device in aerospace equipment, aeronautical equipment, nuclear reactor control systems, life support equipment or systems, transportation machinery engine control or safety-related equipment.**

This device is designed for use in household electrical appliances, office automation equipment, audio and video equipment, computer communications equipment, test and measurement equipment, personal electronic equipment and transportation equipment (excluding engine control).

**Decisions regarding the type of thermal link, the installation location and the mounting method should be made by the customers, based upon the requirements of the final application.**

It is recommended that designers test the final design with the selected thermal link under both normal conditions as well as predicted worst-case scenarios.

▼ **Thermal links should be mounted where it can detect abnormal heat as quickly as possible.**

The thermal link operates when the thermal element within melts. Therefore, if the thermal element does not reach the operating temperature, the cutoff will not activate even if the ambient temperature has risen to the operating temperature. In addition, a short lag time might result in the event of a sudden rise in the ambient temperature or if the thermal link only detects part of the temperature increase.

▼ **Thermal links\* should be mounted such that the temperature gradient is equal throughout the thermal link.**

If lead B of the SF-type, which is caulked to the metal case, is mounted in such a way that it only conducts heat to the metal case, the temperature around the thermal pellet would always be higher than other parts in the metal case. This could lead to the thermal link opening prematurely. Hence, it is recommended that lead A, which is the resin-sealed side, be connected nearer to the heat source.

It should also be mentioned that similarly, if lead A is fixed in a location where the temperature it is exposed to is always lower than that of lead B, the thermal link could also be prematurely triggered.

\* except for SFH/R series

▼ **Cautions about  $T_m$**

Please ensure that the design of the final application does not exceed  $T_m$  (the maximum temperature limit) of the thermal link.

If used in conditions beyond the rated temperature, a dielectric breakdown could result and the thermal link could re-conduct even after opening.

▼ **Cautions about  $T_h$  (SF-type)**

Continuous exposure to temperatures close to the  $T_h$  temperature of the thermal link could result in the thermal pellet reducing in size over time, thereby shortening the lifespan of the thermal link. This change in the pellet size is irreversible. Hence, it is important that designers select and test thermal links suitable for the temperature zone of the final application, based on the temperature recommendations in Table 1.

Please also note that the  $T_h$  temperature test is a one-time test, not a cycle test, conducted continuously for 168 hours.

Designers of the final application should take into account the maximum surface temperature of the thermal link as shown in Table 1, and avoid exceeding this level.

If the body temperature of the thermal link is exceeded on a regular basis, the thermal link may start opening at temperatures lower than the normal operating temperature. Malfunctions may also occur. In case of using SM-type in DC rating, please kindly contact SCHOTT.

**Table 1 Recommended usage temperatures**

SM-type		SF-type					
Part Number	Fuse Body Temperature	SF/R, SF/K, SF/Y series				SFH/R series	
		Part Number	Fuse Body Temperature	Part Number	Fuse Body Temperature	Part Number	Fuse Body Temperature
SM072A	52°C	SF70R, K, Y	50°C	SF139R, Y	119°C	SFH106R	86°C
SM092A, B	72°C	SF76R, K, Y	56°C	SF144R	122°C	SFH109R	89°C
SM110A, B, G	90°C	SF81R	61°C	SF150R, Y	130°C	SFH113R	93°C
SM125A, B	96°C	SF90R, K, Y	70°C	SF167R, K, Y	140°C	SFH117R	97°C
SM137A, B, G	117°C	SF94R, K, Y	74°C	SF184R, Y	140°C	SFH124R	104°C
SM146A, B, G	126°C	SF96K, Y	76°C	SF188R, K, Y	140°C	SFH129R	109°C
SM150A, B	126°C	SF113R, Y	88°C	SF214R, K, Y	140°C	SFH134R	114°C
		SF119R, K, Y	99°C	SF229R, Y	140°C	SFH144R	121°C
		SF129R, Y	109°C	SF240R, Y	140°C	SFH152R	132°C
				SF265R	140°C	SFH162R	140°C
						SFH172R	140°C

Note that the temperature listed in Table 1 refers to the surface temperature of the thermal link, not the ambient temperature.

#### **Thermal links have a limited life.**

The thermal elements used are durable substances designed for long-term use. However, the longevity of the thermal link depends on the conditions in which it is exposed to. This is particularly true if the thermal protection device is frequently exposed to temperatures very close to its operating temperature.

Hence, it is recommended that designers conduct a reliability test by fixing the thermal protection device onto the actual application and simulating the expected operating conditions to assess the lifetime of the device.

#### **The body temperature of the thermal link increases as current passes through it.**

The body temperature of the thermal link could rise to levels higher than the ambient temperature current passes through the device. In addition, the body temperature could also increase depending on a number of factors such as the mounting method. Hence, it is recommended that designers measure the body temperature of the thermal link after conducting a reliability test.

#### **Use the thermal link with a voltage and current level lower than the rated level.**

If the thermal link is used with a voltage or current level higher than the rated level, the contacts may be welded together in the SF-type, causing the thermal link to malfunction. In the SM-type, the body of the thermal link may rupture.

**Do not use the thermal link in an atmosphere out of the standard specifications such as in environments exposed to sulfurous acid gas, nitrogen oxide gas, ammonia gas or conditions that contain formic acid. It is also not suitable for high humidity situations and submersion in a liquid.**

The case of the thermal link\* is made with a copper alloy. Hence, installing the thermal link in such conditions or similar, could deteriorate the sealing resin or lead to cracks in the case of the thermal link due to corrosion. The thermal link could thus operate at lower than operating temperatures or not activate even if its operating temperature is exceeded.

\* SF-K series only

#### **The thermal link corresponds to industrial waste.**


The thermal link corresponds to industrial waste, and requires disposal according to governmental and provincial regulations. The services of a licensed disposal contractor could also be engaged.

#### **The thermal link is a non-repairable device.**

In case of replacement, an equivalent thermal link from the same manufacturer should be used. For general consumers who are not aware of the cautions associated with the thermal link, they should be informed not to mount, remove or replace the thermal link through a note to this effect in the user's manual and other related materials.

## Lead wire process

When bending the lead wire, it is important not to apply excessive pressure to the root of the lead wire. The lead wire should be secured close to the case and bent (not twisted) at a distance 3 mm or more from the body of the fuse.

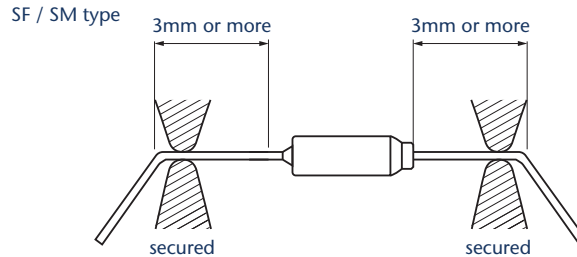


The tensile strength applied to the lead wire should be 49N or less for SF-type and 9.8N or less for SM-types. The strength applied to the body of the thermal link should be 98N or less for SF-type, 49N or less for SM-type. With regards to the SF-type, deformation of the case may change the location of the sliding contact during operation and could lead to the thermal link operating only at temperatures lower than the normal operating temperature range. The thermal link may also not operate even if the thermal link's operating temperature is exceeded.

## Mounting

Thermal links can be mounted by soldering, caulking or welding.

The connecting position should be 5 mm or more from the body of the thermal links.

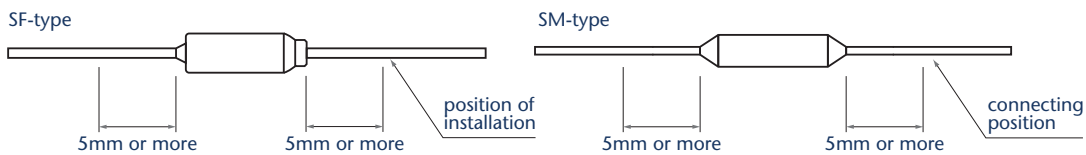


If soldering, take note that the thermal link may function because of excessive solder temperature. To prevent such malfunctions, for example, holding the lead near the case with a tool is effective for allowing the heat to escape and the soldering should be done in short intervals.

Another effective method is to use a lower solder temperature and to solder at a location that is at a distance from the case.

If caulking or welding, be careful to keep the resistance value of the connecting section low. If the connecting section has a high resistance value, the passing current may generate an abnormally high temperature that will cause the thermal link to operate. If caulking particularly, please test many times because heat-cycle and humidity cause a high resistant value.

After mounting the thermal link, be careful not to apply force that may pull, push or twist the lead wires.

If using a SF-type thermal link, the lead on the resin-sealed side must not be allowed to touch the case. This would cause the current to flow from the lead on the resin-sealed side to the opposite lead resulting in a non-functioning thermal link.



Note that the body of the SF-type is the same in potential as the circuit. Therefore, it must be electrically isolated from other metallic parts.

## Storage

The body and lead A of the SF-type, and the leads of SM092A and SM092B are silver-plated. Therefore, these parts may discolor because of sulfuration, making the markings on the body illegible or negatively affecting the solder-ability of the lead. To avoid this, the thermal link should not be kept around materials (such as cardboard or rubber, etc.) which generate sulfurous acid gas.

When storage in cardboard boxes is required, thermal links should be double packed and sealed in polybags such as polyethylene.

## Recommendation

SCHOTT recommends the following tests upon receipt and after mounting of the thermal link, as it may have undergone some mechanical load or thermal influence during transportation or when being mounted.

1. Appearance check
2. Resistance check (comparing before with after), or conductive check
3. X-ray inspection
4. Operation check for sampling

Be careful when mounting the thermal link because external force, heat or a harmful atmosphere (containing excessive humidity or sulfurous acid gas) may damage the thermal link.

If applicable, it is recommended that the general consumers, who are unaware of the usage cautions for thermal links, be informed not to mount, remove, or replace the thermal link through a note to this effect in the user's manual and other related material.

All reasonable care has been taken to present the data here and the values contained in this document were obtained under certain testing conditions by us. They are not guaranteed and are for reference only.

For any clarifications or more information about these cautions, please kindly contact SCHOTT.

**The information herein is based on the documents as of April 2024, and is subject to change without notice. Therefore it is recommended to refer to latest individual information such as drawing for mass production designing. The latest product information will also be made available on [www.schott.com](http://www.schott.com) for your reference.**

It is prohibited to reprint or copy the contents herein without prior written agreement from SCHOTT Japan Corporation.

Please note that should any problems relevant to the industrial property of third parties occur with the use of products from SCHOTT Japan Corporation, the company would not assume any responsibility for matters other than the ones directly related to the structure or the manufacturing process of the products supplied by SCHOTT Japan Corporation.

Although continuous efforts to improve the quality and reliability of our products are in place, the possibility of defects cannot be entirely eliminated. Therefore when using our electronic component products, please ensure that sufficient safety measures are included in the design of the final application, such as redundancy, fire containment and malfunction prevention against physical injuries, fire disasters and social damages in consideration of the said defect occurrences.

Our products are classified into 2 groups: "Standard" and "Special". The recommended applications of the products according to its quality level are indicated below. If you intend to use our products for applications other than "Standard" level, please consult with our sales representative in advance.

"Standard"

Computers, office equipment, communication equipment, measuring equipment, audio & visual equipment, home electric appliances, machine tools, personal electrical equipment and industrial robots, etc.

"Special"

Transportation equipment (automobiles, trains, ships and others), aircrafts, aerospace equipment, medical equipment for life support, etc.

**schott.com**

SCHOTT North America, Inc.

Phone: +1 508 764 9374, [epackaging@us.schott.com](mailto:epackaging@us.schott.com)