

# SCHOTT Glass for Restoration

## GOETHEGLAS, RESTOVER<sup>®</sup>, TIKANA<sup>®</sup>

### Technical Data Sheet

#### Production and usage

##### SCHOTT Glass for Restoration

- Is created specifically as glazing that corresponds to the historical epoch of a building.
- Offers the typical surface characteristics of glass from different historical epochs while also capable of being processed as state-of-the-art insulating and laminated glass.
- Is produced using the traditional Fourcault process. The glass is drawn vertically upwards from a liquid melt through a nozzle into a drawing shaft. At the end of the drawing shaft, the glass is cut to sheet size.
- Has the striations typical for the manufacturing process. The glass also has varying degrees of waviness depending on the product.
- Is the right choice for the faithful restoration of windows and doors in historical buildings and monuments from different epochs.
- Is also suitable for glazing historical display cases and furniture as well as historical mirrors.


#### Processing

##### 1. Are there specifications and structural approvals for SCHOTT glass for restoration?

The physical, chemical and technical properties of all SCHOTT glass for restoration are described in specifications. In addition, all SCHOTT glass for restoration has European Technical Assessment ETA-12/0159 from the German Institute for Construction Technology (DIBT), i.e. depending on the glass thickness, it can be processed into standard building products such as toughened safety glass, laminated safety glass and insulating glass.

##### 2. What needs to be considered when cutting the glass?

Due to a possibly higher residual cooling stress and larger distortions than with floated glass, cutting must be carried out with an expansion cut while taking into account specific cutting wheel angles and cutting pressures.

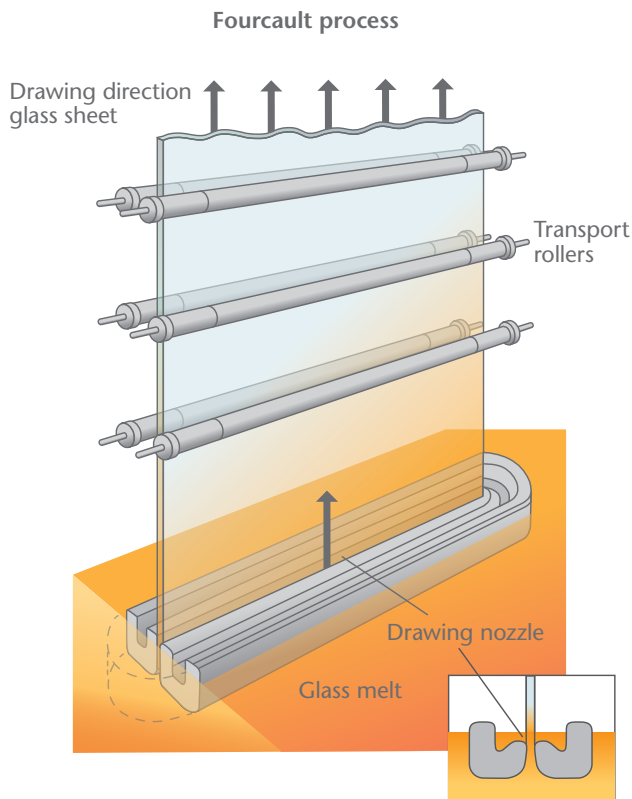

##### 3. Processing options

- Use of standard PVB films for laminated glass
- Use of thicker films to compensate for thickness fluctuations
- Use of special UV or IR filter films to meet increased light requirements
- Use of sound insulation films to reduce noise pollution in buildings
- Outer pane of insulating glass available as glass for restoration
- Use of sun protection layers
- Option to produce insulating glass with an overall thickness of approx. 10 mm (3/8")

# SCHOTT Glass for Restoration

## GOETHEGLAS, RESTOVER<sup>®</sup>, TIKANA<sup>®</sup>

### Technical Data Sheet

Glass type	Thickness* mm (inches)	Thickness tolerance mm (inches)	Standard dimensions* mm x mm (inches x inches)
GOETHEGLAS	4.5 (9/50")	± 0.50 (0.02")	2,100 x 1,500 (82.7" x 59.1")
			2,400 x 1,500 (94.5" x 59.1")
			2,700 x 1,500 (106.0" x 59.1")
RESTOVER <sup>®</sup>	2.0 (1/16")	± 0.25 (0.01")	1,600 x 1,400 (63.0" x 55.1")
			2,100 x 1,400 (82.7" x 55.1")
	2.75 (1/100")	± 0.25 (0.01")	1,000 x 1,500 (39.4" x 59.1")
			1,600 x 1,500 (63.0" x 59.1")
	4.0 (5/32")	± 0.25 (0.01")	2,100 x 1,500 (82.7" x 59.1")
			2,400 x 1,500 (94.5" x 59.1")
RESTOVER <sup>®</sup> light	2.75 (1/100")	± 0.25 (0.01")	2,700 x 1,500 (106.0" x 59.1")
			1,000 x 1,500 (39.4" x 59.1")
			1,600 x 1,500 (63.0" x 59.1")
	4.0 (5/32")	± 0.25 (0.01")	2,100 x 1,500 (82.7" x 59.1")
			2,400 x 1,500 (94.5" x 59.1")
			2,700 x 1,500 (106.0" x 59.1")
RESTOVER <sup>®</sup> plus	2.95 (3/25")	± 0.35 (0.01")	1,000 x 1,500 (39.4" x 59.1")
			1,600 x 1,500 (63.0" x 59.1")
			2,100 x 1,500 (82.7" x 59.1")
TIKANA <sup>®</sup>	4.0 (5/32")	± 0.25 (0.01")	2,100 x 1,500 (82.7" x 59.1")
			2,100 x 1,700 (82.7" x 67.1")
			2,400 x 1,500 (94.5" x 59.1")
			2,400 x 1,700 (94.5" x 67.1")
			2,700 x 1,500 (106.0" x 59.1")
			2,700 x 1,700 (106.0" x 67.1")
	6.0 (1/4")	± 0.50 (0.02")	2,100 x 1,500 (82.7" x 59.1")
			2,100 x 1,700 (82.7" x 67.1")
			2,400 x 1,500 (94.5" x 59.1")
			2,400 x 1,700 (94.5" x 67.1")
			2,700 x 1,500 (106.0" x 59.1")
			2,700 x 1,700 (106.0" x 67.1")

\*Other dimensions on request.

# SCHOTT Glass for Restoration

## GOETHEGLAS, RESTOVER<sup>®</sup>, TIKANA<sup>®</sup>

### Technical Data Sheet

#### GOETHEGLAS

GOETHEGLAS is a colorless, drawn glass with the distinctive, irregular window glass surface typical of the 18<sup>th</sup> and 19<sup>th</sup> centuries. It is also suitable as exterior protective glass, e.g. to protect valuable lead glazing from the impact of the weather and the environment.

#### RESTOVER<sup>®</sup>

RESTOVER<sup>®</sup> resembles window glass manufactured around the turn of the last century. Its low thickness facilitates installation in historical window frames and profiles. RESTOVER<sup>®</sup> light and RESTOVER<sup>®</sup> plus can provide a less or more textured surface variant resembling traditional blown glass depending on individual requirements.

#### TIKANA<sup>®</sup>

TIKANA<sup>®</sup> is particularly suitable for buildings in the Bauhaus style. Its slightly irregular surface blends harmoniously into classical modernist buildings. Like the other SCHOTT glass for restoration variants, TIKANA<sup>®</sup> enables an historical look to be integrated into state-of-the-art structural features.



Babelsberg Palace, Babelsberg, Germany



German Historical Museum, Berlin, Germany



Maggi-Areal, Kemptthal, Switzerland



[schott.com](http://schott.com)

SCHOTT North America, Inc., 5530 Shepherdsville Road, Louisville, KY 40228, USA  
Phone +1 (502) 657-4417, [info.architecture@us.schott.com](mailto:info.architecture@us.schott.com)

**SCHOTT**  
glass made of ideas

carbon neutral  
natureOffice.com | DE 07 422910  
print production

MIX  
paper from  
responsible  
FSC  
C008855  
www.fsc.org

10454 ENGLISH/US 02/2023 kn/nino Printed in Germany